

IMS LC (Low Cost) Hopper Magnets

Basic protection against tramp ferrous metal

- Diverters force material to flow across magnetic surfaces
- Ceramic magnet bars provide excellent holding power
- Low profile design takes up less room in the hopper
- Available for rectangular hoppers only




Standard 2" tube spacing
is based on

MAXIMUM MAGNETIC FLUX FIELD PATTERN

to catch the finest steel particles

Special diverters direct all the plastic through the magnetic field without obstructing material flow

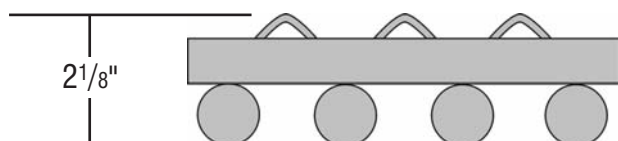

Specifications and Prices

Diverters: 1" wide, 16 gauge, 90° bend, 5/8" legs
Space (between diverters): 1"
Webs: 11 ga.
Web Size: 3/4" high
Magnetic Tubes: 1" O.D. (.049 wall)

Magnets: ceramic
Spacing on Center: 2" bar to bar
Space Between Tubes: 1"
Construction: tack welded 2 places each tube
Finish: 80-grit glass bead blasted
Type of Stainless: 304
Overall Height: 2 1/8"

Length	Width (Tube Length)									
	4"		6"		8"		10"		12"	
	Item #	Prices	Item #	Prices	Item #	Prices	Item #	Prices	Item #	Prices
3 1/2"	106520	\$33.75	109137	\$39.30	110090	\$45.00	110174	\$51.85	110156	\$58.95
5 1/2"	107990	126.00	108161	130.45	109745	60.25	110084	57.65	110170	78.80
7 1/2"	107324	42.95	107321	62.80	106422	142.80	110106	70.35	106561	177.05
9 1/2"	110078	54.30	110165	71.75	110145	87.15	107818	184.10	110116	99.75
11 1/2"	110103	65.80	110093	114.45	110178	102.70	110161	105.00	110141	105.00



= Highest Quality & Value Products



= Industry Standard Quality Products



= Value-Priced Supplies



www.imscompany.com | phone order toll-free (USA & Canada) **1.800.537.5375**

fax order toll-free (USA & Canada)

phone order toll-free (Mexico)

tech support toll-free (USA & Canada)

e-mail

1.888.288.6900

001.888.304.1307

1.866.467.9001

sales@imscompany.com

