

Hi-Strength Lifting Eye

- Maintain load ratings at lift angles of 90°
- Load ratings of 9,000 lbs to 15,000 lbs
- Safety Factor 5:1
- Made of 4340 steel




Purchasers also order:

- Universal Lift Rings, page 46
- Heavy Duty Hoist Rings, pages 42-43
- Heavy Duty Mold Slings, page 48
- Mold Handling Latches, page 49
- Copper Flake Thread Lube, page 253

| Item # | Thread Size | Thread Length | Eye I.D. | Eye O.D. | Clevis | Capacity at 90° | Prices |
|--------|-----------------------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|-----------------|---------|
| 121852 | 1"-8 | 1 ⁷ / ₈ " | 2 ¹ / ₄ " | 4" | 5" | 9,000 lbs. | \$36.70 |
| 121849 | 1 ¹ / ₄ "-7 | 1 ³ / ₄ " | 2" | 4 ¹ / ₂ " | 5 ⁵ / ₈ " | 10,000 lbs. | 61.60 |
| 121847 | 1 ¹ / ₂ "-6 | 2" | 2 ¹ / ₂ " | 5 ¹ / ₄ " | 6 ⁵ / ₈ " | 15,000 lbs. | 106.55 |

For more versatile help with heavy duty lifting applications —
Ask about Chain Slings

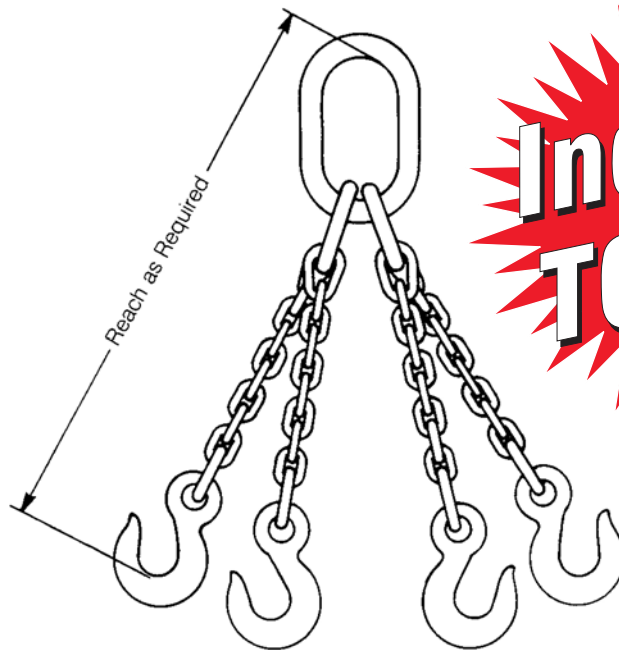

www.imscompany.com | phone order toll-free (USA & Canada) **1.800.537.5375**

fax order toll-free (USA & Canada) | phone order toll-free (Mexico) | tech support toll-free (USA & Canada) | e-mail
1.888.288.6900 | **001.888.304.1307** | **1.866.467.9001** | **sales@imscompany.com**

