




Full-Port Male/Female Ball Valves

Prevents fluid loss during mold changes

- Deep threads
- Threaded ends to ANSI B 1.201
- Durable forged brass construction
- Easy installation
- 1/4 turn shut off
- Full-flow design
- Virgin PTFE seats and seals
- Blowout-proof stem
- Zinc-plated steel handle with plastic hand grip
- 1/2" chrome-plated ball
- Working pressure: 600 psi (water oil gas)
- Temperature range: 0° F to 300 F

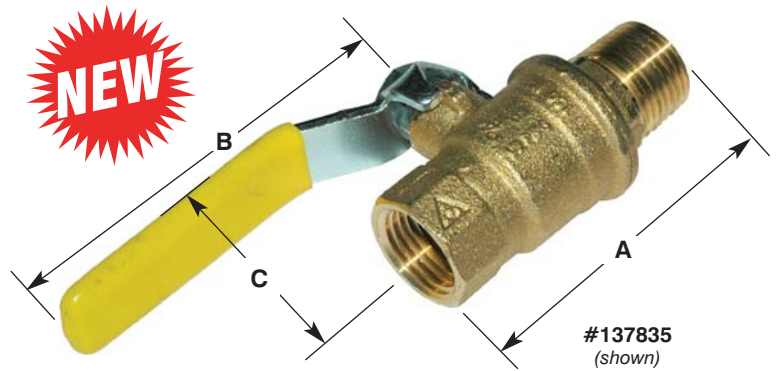

Certifications: NSF-61, CSA-AGA, UL, FM

Specifications and Prices					
N.P.T.	Length (A)	Handle Length (B)	Height (C)	Item #	Prices
1/4"	2"	3.35"	1.75"	138279	\$ 5.35
3/8"	2"	4"	2"	138280	5.35
1/2"	2.375"	3.5"	2.25"	137835	6.85
3/4"	2.625"	4"	2.5"	138281	9.55
1"	3"	5"	2.875"	138282	15.00
1 1/4"	3.56"	4.52"	2.95"	138283	43.60
1 1/2"	3.96"	5.5"	3.34"	138284	42.50
2"	4.5"	5.5"	3.68"	138285	70.50

Stainless Steel Valves Available — INQUIRE

IMS Select = Highest Quality & Value Products

IMS = Industry Standard Quality Products

\$\$\$ = Value-Priced Supplies



www.imscompany.com | phone order toll-free (USA & Canada) **1.800.537.5375**

fax order toll-free (USA & Canada) | phone order toll-free (Mexico) | tech support toll-free (USA & Canada) | e-mail

1.888.288.6900 | **001.888.304.1307** | **1.866.467.9001** | sales@imscompany.com

