


# Non-Stock Heater Bands

## SPECIFY:

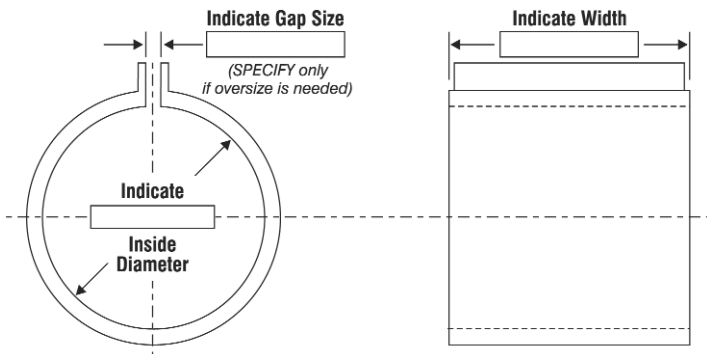

A good rule of thumb for figuring the maximum available heater band wattage:  
 $3.14 \times \text{band I.D.} \times \text{band width} \times 35$

Quantity: \_\_\_\_\_  
 Mfg. (if known): \_\_\_\_\_  
 Mfg. Part No. (if known): \_\_\_\_\_  
 Wattage: \_\_\_\_\_  
 Voltage: \_\_\_\_\_

Type: Hot Sleeve  V Band  S Band   
 Plastic Proof  Key Lock  Xtreme Key Lock   
 Xtreme  Super High Watt Density   
 Adjustable

### Construction

One-Piece  Two-Piece   
 Other (describe): \_\_\_\_\_  
 \_\_\_\_\_

### Insulation

Mica  Compacted Mineral  Kaowool   
 Ceramic

### Lock-up





Flange \* Strap \* Key (Wedge)   
 Barrel Nut   
 \* Standard Screws  Spring Bolts

Other (describe): \_\_\_\_\_  
 \_\_\_\_\_

## Electrical Connections

— NOTE —

Illustrate location  
 of connection on diagrams above.

- Flex Leads:  \_\_\_\_\_ long
- Flex Leads with Armor Sleeving:  \_\_\_\_\_ long
- Flex Leads with Braided Wire Sleeving:  \_\_\_\_\_ long
- 
- Post Terminals:  
- Post Terminals with Terminal Box:  
- Post Terminals with Voltraps:
- Post Terminals with Terminal Caps:  
- 
- Plug Connector (Blade):
- Plug Connector (European):  
- Expedited 24-48 Hour Service:

## Special

For holes, cut-outs and notches,  
 indicate size and location on drawings above.

Date: \_\_\_\_\_ Quantity: \_\_\_\_\_ Phone: ( \_\_\_\_\_ ) \_\_\_\_\_ Fax: ( \_\_\_\_\_ ) \_\_\_\_\_

Name: \_\_\_\_\_ Title: \_\_\_\_\_

Company Name: \_\_\_\_\_ Email: \_\_\_\_\_

Address: \_\_\_\_\_

City: \_\_\_\_\_ State: \_\_\_\_\_ Zip: \_\_\_\_\_



www.imscompany.com | phone order toll-free (USA & Canada) **1.800.537.5375**

fax order toll-free (USA & Canada) 1.888.288.6900 | phone order toll-free (Mexico) 001.888.304.1307 | tech support toll-free (USA & Canada) 1.866.467.9001 | e-mail sales@imscompany.com

