


Non-Stock Spring Adjustable Immersion Thermocouples

SPECIFY:

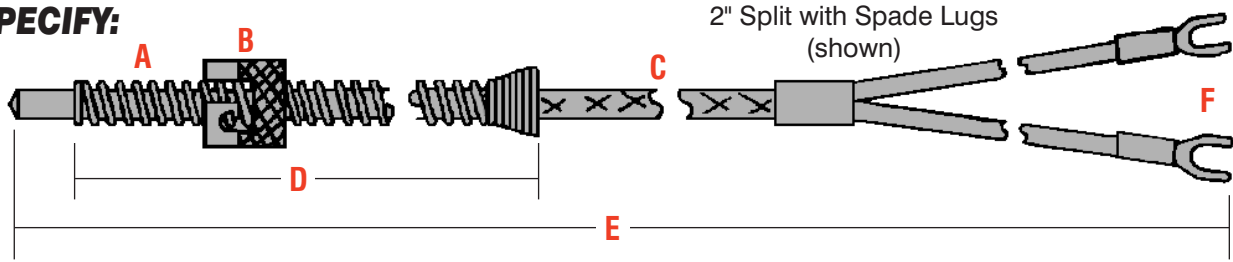

Thermocouple Type: J K Other _____

Junction: Grounded Ungrounded

Conductor Wire: Solid Stranded

A) Tip and Spring O.D. (NOTE: Tip O.D. will indicate Spring O.D.)

Tip O.D.	Spring O.D.
<input type="checkbox"/> .125"	.203"
<input type="checkbox"/> .188"	.263"
<input type="checkbox"/> .250"	.324"

B) Bayonet Cap Style: 7/16" I.D. Single Slot (standard) 15 mm I.D. Dual Slot
 12 mm I.D. Slot Positive Seat Indicating
 12 mm O.D. Pin

C) Lead Type: Fiberglass Insulation Stainless Steel Braid Stainless Steel Armor

D) Spring Length: _____

E) Overall Length with Lead Wire Termination: _____

F) Terminations: Leads Not Stripped Standard Male Plug Mini Male Plug
 2" Split, 1/4" Stripped Standard Female Jack Mini Female Jack
 2" Split with Spade Lugs 2" Split with 1/4" Female Disconnects

Options: Mating Connector Cable Clamp Box Connector

If you have any questions, contact an IMS Customer Service Representative.

Date: _____ Quantity: _____ Phone: (_____) _____ Fax: (_____) _____

Name: _____ Title: _____

Company Name: _____ Email: _____

Address: _____

City: _____ State: _____ Zip: _____




www.imscompany.com | phone order toll-free (USA & Canada) **1.800.537.5375**

fax order toll-free (USA & Canada) 1.888.288.6900 | phone order toll-free (Mexico) 001.888.304.1307 | tech support toll-free (USA & Canada) 1.866.467.9001 | e-mail sales@imscompany.com



Non-Stock Spring Adjustable Immersion Thermocouples

SPECIFY:

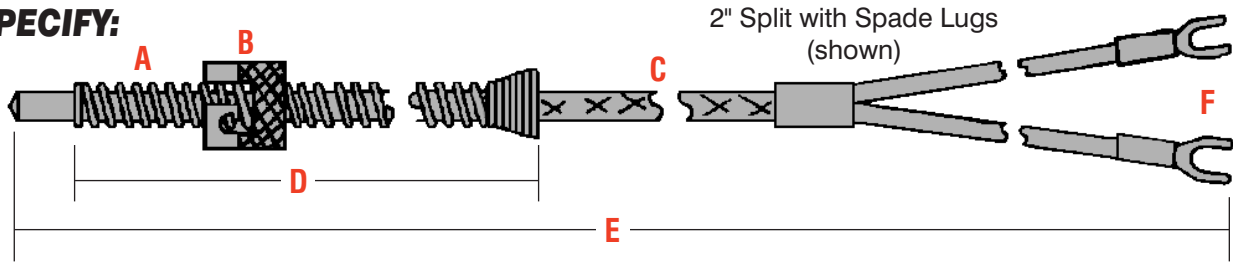

Thermocouple Type: J K Other _____

Junction: Grounded Ungrounded

Conductor Wire: Solid Stranded

A) Tip and Spring O.D. (NOTE: Tip O.D. will indicate Spring O.D.)

Tip O.D.	Spring O.D.
<input type="checkbox"/> .125"	.203"
<input type="checkbox"/> .188"	.263"
<input type="checkbox"/> .250"	.324"

B) Bayonet Cap Style: 7/16" I.D. Single Slot (standard) 15 mm I.D. Dual Slot
 12 mm I.D. Slot Positive Seat Indicating
 12 mm O.D. Pin

C) Lead Type: Fiberglass Insulation Stainless Steel Braid Stainless Steel Armor

D) Spring Length: _____

E) Overall Length with Lead Wire Termination: _____

F) Terminations: Leads Not Stripped Standard Male Plug Mini Male Plug
 2" Split, 1/4" Stripped Standard Female Jack Mini Female Jack
 2" Split with Spade Lugs 2" Split with 1/4" Female Disconnects

Options: Mating Connector Cable Clamp Box Connector

If you have any questions, contact an IMS Customer Service Representative.

Date: _____ Quantity: _____ Phone: (_____) _____ Fax: (_____) _____

Name: _____ Title: _____

Company Name: _____ Email: _____

Address: _____

City: _____ State: _____ Zip: _____



www.imscompany.com | phone order toll-free (USA & Canada) **1.800.537.5375**

fax order toll-free (USA & Canada) 1.888.288.6900 | phone order toll-free (Mexico) 001.888.304.1307 | tech support toll-free (USA & Canada) 1.866.467.9001 | e-mail sales@imscompany.com

