


# TIE BAR SLEEVES


*Keep tie bar grease IN / Keep abrasive airborne particles OUT*

- Prevent tie bar grease from contacting molded parts
- Protect tie bars and bushings from abrasive airborne particles

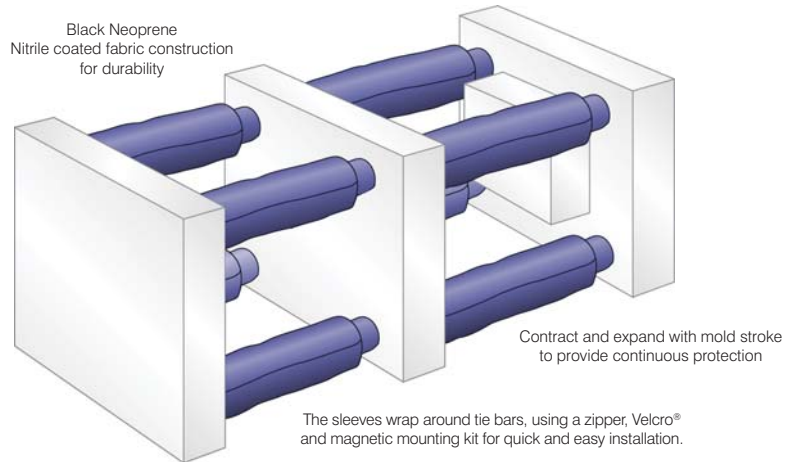

**MAXIMUM**  
Use Temperature:  
240° F

## CUSTOM MADE TO ANY TIE BAR DIAMETER AND LENGTH

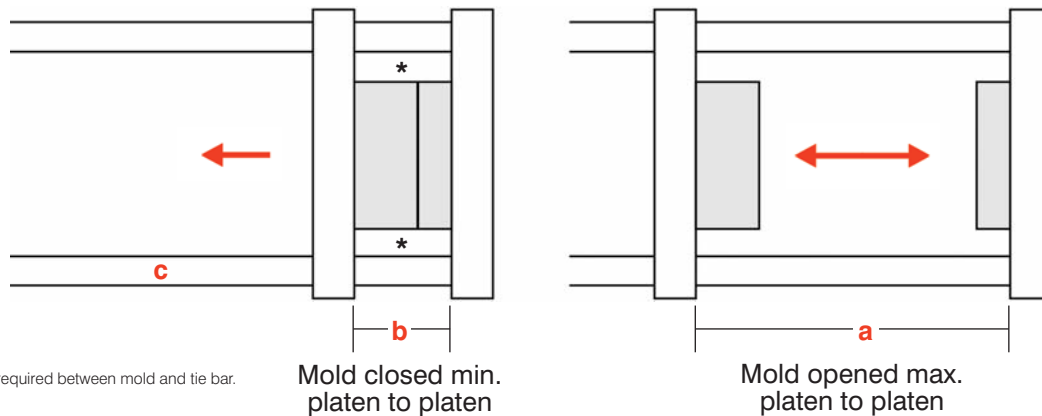

### SPECIFY:

**a. Mold Open:** \_\_\_\_\_

**b. Mold Closed:** \_\_\_\_\_

**c. Tie Bar Diameter:** \_\_\_\_\_

mold open divided by 3 = max. mold close  
(note: max. mold close can be smaller)

Date: \_\_\_\_\_ Quantity: \_\_\_\_\_ Phone: ( \_\_\_\_\_ ) \_\_\_\_\_ Fax: ( \_\_\_\_\_ ) \_\_\_\_\_

Name: \_\_\_\_\_ Title: \_\_\_\_\_

Company Name: \_\_\_\_\_ Email: \_\_\_\_\_

Address: \_\_\_\_\_

City: \_\_\_\_\_ State: \_\_\_\_\_ Zip: \_\_\_\_\_

Velcro® is a registered trademark of VELCRO Industries



[www.imscompany.com](http://www.imscompany.com) |

phone order toll-free  
(USA & Canada)

**1.800.537.5375**

fax order toll-free (USA & Canada)

phone order toll-free (Mexico)

tech support toll-free (USA & Canada)

e-mail

**1.888.288.6900**

**001.888.304.1307**

**1.866.467.9001**

**sales@imscompany.com**

